Specification

1/3" Sony Effio-E 960H Exview CCD Maximum 700TVL	
1/3" Sony Color CCD 540TVL	
1/3" Sony Color CCD 480TVL	
1/3" Sony Super HAD CCD 420TVL	
1/4" Sony Color CCD 420TVL	
1/4" Sharp Color CCD 420TVL	

Pixel	700/TVL	PAL:976*582		NTSC:976*494	
	540TVL	PAL:795×596		NTSC:811×508	
	480TVL	PAL:752×582		NTSC:768×494	
	420TVL	PAL:500×582		NTSC:510×492	
Lens	3.6mm				
	6 mm				
Clock Frequency MHZ		PAL:19.3125 / NTSC:19.0699			
Scanning System		2:1 interlace			
Mini. Illumination		0 LUX(With IR Led On)			
Synchronous System		Internal,Negative sync			
S/N Ratio		48 dB			
Auto Electronic Shutter		PAL:1/50-1/100,000sec;NTSC:1/60-1/100,000			
Gama Characteristic		0.45			
Video Output		1 Vpp,75 Ohms			
Auto Gain Control		Auto			
LED		23/30EA option			
IR DIstance		20-25M			
Voltage		DC12V, Adapter DC12V 1A			
Current		DC12V 300mA			
Operation emperature		-10-45℃			
Color		gray			
Dimensions		155*65*129mm			
Net Weight		490g/pcs			

Content

No	Name	QTY.
1.	WeatherProof IR Camera	1
2.	UserGuide	1

User Manual

Weatherproof Color Camera

Notes: Before providing power for the camera, please read this User Guide in detail!

Do not attempt to disassemble the camera. If the camera can not work, please contact local franchiser or our company.

CONNECTING

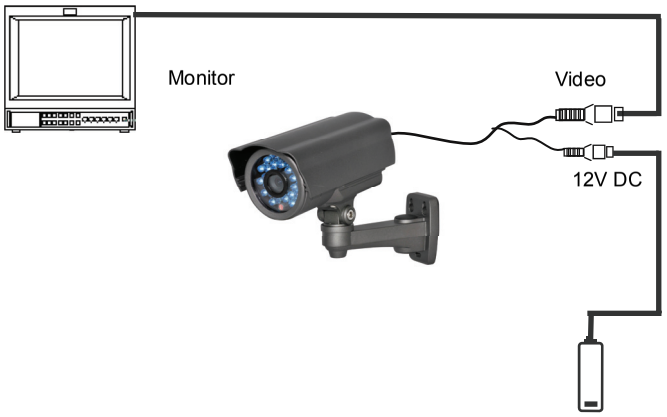



Notes:

- The power supply must through safe attestation. Its output voltage、current、voltage polarity and operating temperature must match the camera's requirement.
- When using the camera in the thunderbolt condition, please note to mount Anti-thunder device or put off the power supply plug and cable.
- In order to capture high quality pictures, the power supply's cable and video output cable should not be too long.

PRODUCT IMAGE

TROUBLE AND SOLUTION

1. No Picture after providing power

. May be the power supply voltage abnormity, please check the power supply voltage and pole whether exactitude.

. Please check all the connecting cable and monitors whether be connected correctly or not.

2. The picture level direction have flowing interference ripples

. May be caused by the power supply AC ripples, it need filter the wave of the power supply.

. Check the monitor and peripheral equipments used.

3. The picture background color changes continuously

. The fluorescent lamp's electromagnetic field cause color roll. This is proper phenomenon of the cameras.

. Reduce the fluorescent lamp numbers or increase the distance between the camera and the fluorescent lamps can improve it.

. Use power supply external sync. camera can solve it.

4. The picture smear too mass

. The power supply's voltage unstable.

. Connecting cables not connect correctly or have high impedance.

INTRODUCTION

Congratulations on your purchase of this product. We adopt the latest SONY technical of sensor and driver. The most attractive characteristics are water-resistant, and widely applicable to day & night, indoor & outdoor. In addition, it owns the characters of high definition and stability, strong anti-jamming, rich and real color. Fixing and using this model are convenient too. It is very good for you to apply to yours CCTV system.

Please read this instruction manual carefully to ensure proper use of the product.

Warning — To prevent fire or shock hazarded. Do not expose the unit into water too long time directly.

The symbol is intended to alert the user to the presence of important operating and maintenance (servicing) Instructions in the literature accompanying the appliance.

The symbol is intended to alert the user to the presence of uninsulated 'dangerous voltage' within the product's enclosure that may be of sufficient Magnitude to constitute a risk of electric shock to persons.

CAUTION:
RISK OF ELECTRIC. DO NOT OPEN

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER OR BANCK NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO OUALIFIED SERVICE PERSONNEL.

CAUTION:
To prevent electric shocks and risk of fire hazards, do NOT use other than specified power source.

Note:

- Please note the camera's operating temperature and its using environment requirement. Avoid using the camera at too high or too low temperatures. The operating temperature is -10℃-50℃. (Recommendatory operating temperature is -5℃--40℃.)
- Never make the camera face the sun or bright object. Otherwise, it will damage the CCD.
- Do not mount the camera near by the radiator or heater.